

RoHS Compliant

成品图

SPECIFICATION


- 1 Contact resistance: $\leq 20m\Omega$
- 2 Insulation resistance: $\geq 1000M\Omega$
- 3 Rated voltage: 250 V AC DC
- 4 Rated current: 1.0 A AC DC
- 5 Withstand Voltage: 500V AC/minute
- 6 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

A1271A-*-C3KC-***

PART No. _____
 No. OF CIRCUITS: _____
 201~240
 PLASTIC MATERIAL: _____
 C3K=PA6T (BLACK)
 E2K=PBT (BLACK)

PACKAGING:
 P=PE
 B=Tray
 PLATING:
 C=GOLD

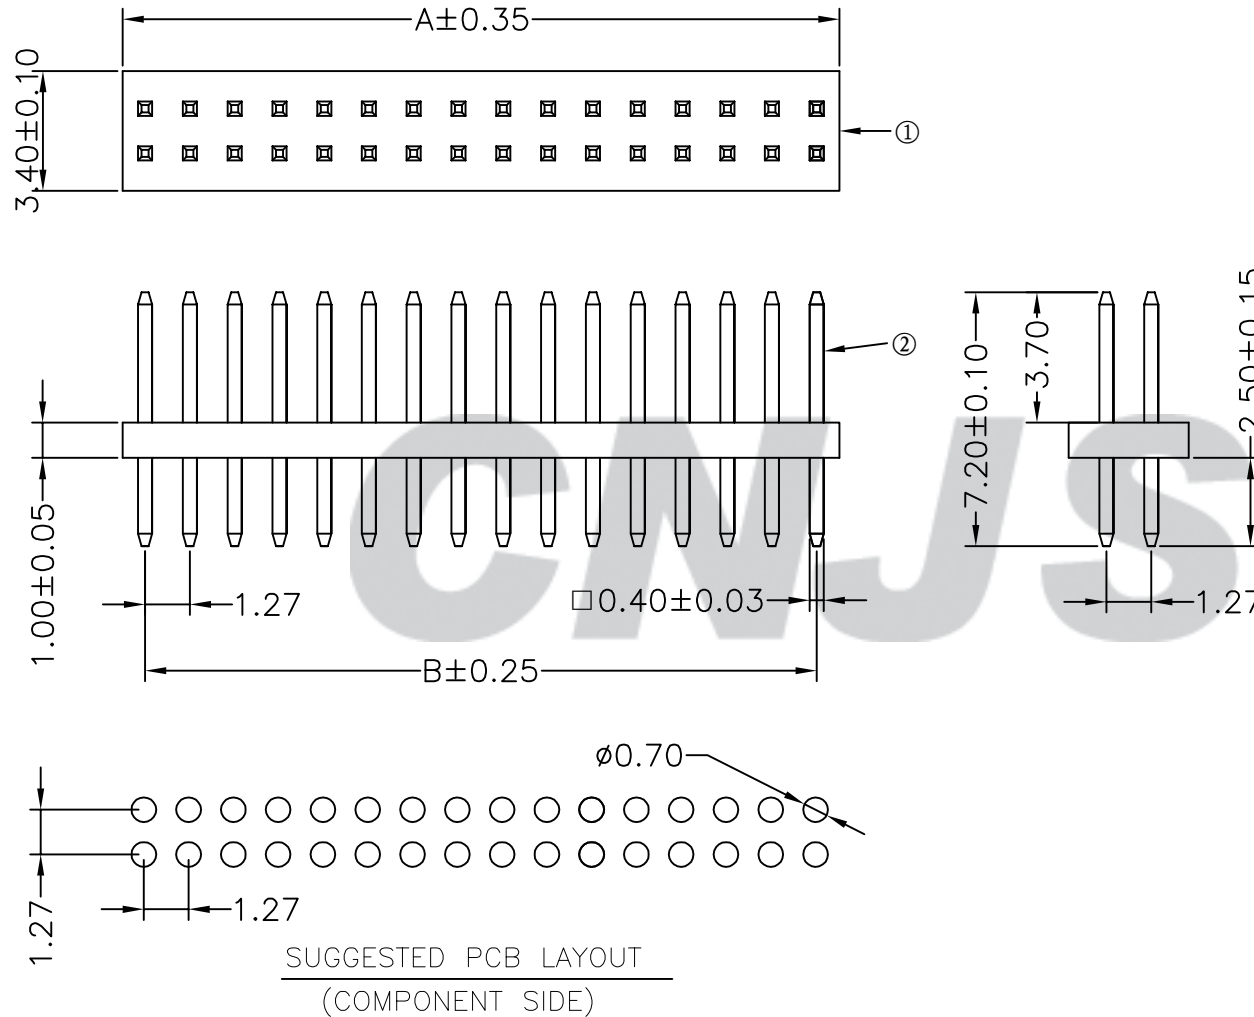

Circuits	Dimensions		Circuits	Dimensions	
	A	B		A	B
2*1	1.27	0	2*21	26.67	25.40
2*2	2.54	1.27	2*22	27.94	26.67
2*3	3.81	2.54	2*23	29.21	27.94
2*4	5.08	3.81	2*24	30.48	29.21
2*5	6.35	5.08	2*25	31.75	30.48
2*6	7.62	6.35	2*26	33.02	31.75
2*7	8.89	7.62	2*27	34.29	33.02
2*8	10.16	8.89	2*28	35.56	34.29
2*9	11.43	10.16	2*29	36.83	35.56
2*10	12.70	11.43	2*30	38.10	36.83
2*11	13.97	12.70	2*31	39.37	38.10
2*12	15.24	13.97	2*32	40.64	39.37
2*13	16.51	15.24	2*33	41.91	40.64
2*14	17.78	16.51	2*34	43.18	41.91
2*15	19.05	17.78	2*35	44.45	43.18
2*16	20.32	19.05	2*36	45.72	44.45
2*17	21.59	20.32	2*37	46.99	45.72
2*18	22.86	21.59	2*38	48.26	46.99
2*19	24.13	22.86	2*39	49.53	48.26
2*20	25.40	24.13	2*40	50.80	49.53

					Tolerance X.X ± 0.30 X.XX ± 0.20 X.XXX ± 0.10 Angle $\pm 3.0^{\circ}$	Model Name: 2.00mm pitch 180° Single row wafer-DIP TYPE Model No: A1271A-***-C3KC-*	Drawn: 张育斌 2016.06.12	
					UNIT: mm	SCALE: FULL	REVISION: B/0	Checked: 林旭芝
					② Contacts 2~80 Brass Gold-plated	Approved: 刘祚杰		
					① Insulator 1 PA6T (UL94V-0) Black	DWG NO. CNJST/GCCP-0212		
REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
B/0	2016.04.12	NEW RELEASE		②	Contacts	2~80	Brass	Gold-plated
				①	Insulator	1	PA6T (UL94V-0)	Black