
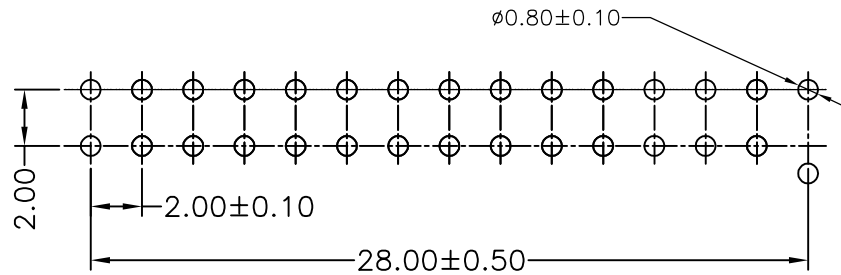
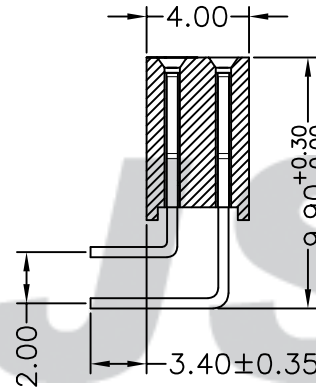
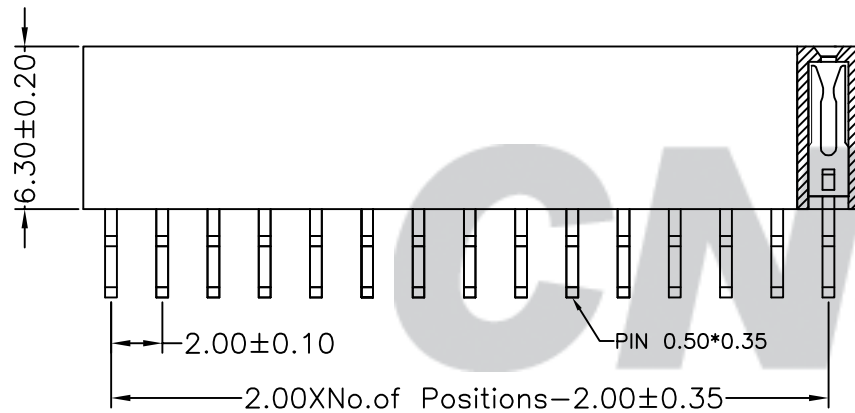


RoHS Compliant

成品图

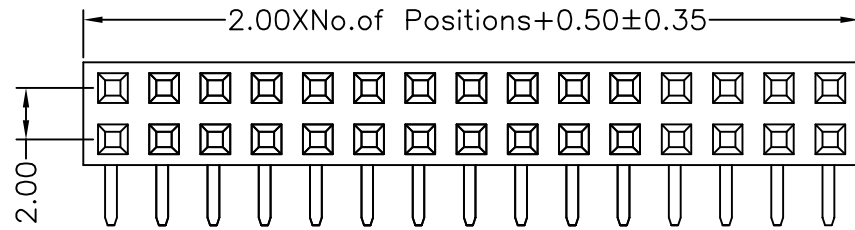

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

SPECIFICATION

- 1 Contact resistance: $\leq 20\text{m}\Omega$
- 2 Insulation resistance: $\geq 1000\text{M}\Omega$
- 3 Rated voltage: 250 V AC DC
- 4 Rated current: 1.5 A AC DC
- 5 Withstand Voltage: 500V AC/minute
- 6 Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

ORDER INFORMATION:

P2003AW-*-**KC-B**

PART No.:		PACKAGING:	B=TRAY
No. OF CIRCUITS:		PLATING:	C=Gold-plated
2X3~2X40			
PLASTIC MATERIAL:			
E2K=PBT (BLACK)			
C3K=PA6T (BLACK)			

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
B/0	2016.05.24	NEW RELEASE		②	Contacts	6~80	Phosphor Bronze	Gold flash
				①	Insulator	1	PA6T (UL94V-0)	BLACK

Tolerance	Model Name: 2.00mm PITCH Female Header Straight 90° Wafer-DIP TYPE	Drawn: 蔡忠忠 2016.05.24
X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0°	Model No: P2003AW-**-C3KC-*	
	SCALE: FULL	REVISION: B/0
UNIT: mm	Checked: 林旭芝	
	Approved: 刘祚杰	
	DWG NO. CNJST/GCCP-0137	



CNJST 浙江捷仕泰电子有限公司
ZHEJIANG JIESHITAI ELECTRONIC CO., LTD