
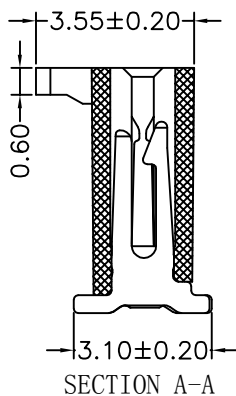


RoHS Compliant

成品图






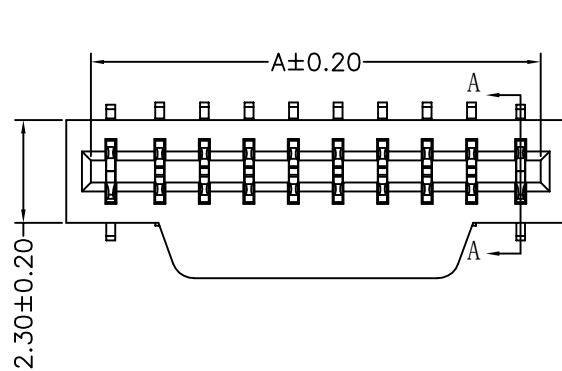


Circuits	Dimensions		
	A	B	C
05	7.10	8.20	4.00
06	8.10	9.20	5.00
07	9.10	10.20	6.00
08	10.10	11.20	7.00
09	11.10	12.20	8.00
10	12.10	13.20	9.00
11	13.10	14.20	10.00
12	14.10	15.20	11.00
13	15.10	16.20	12.00
14	16.10	17.20	13.00
15	17.10	18.20	14.00

SPECIFICATION

- 1 Contact resistance: $\leq 30m\Omega$
- 2 Insulation resistance: $\geq 500M\Omega$
- 3 Rated voltage: 50 V AC DC
- 4 Rated current: 0.5 A AC DC
- 5 Withstand Voltage: 500V AC/minute
- 6 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

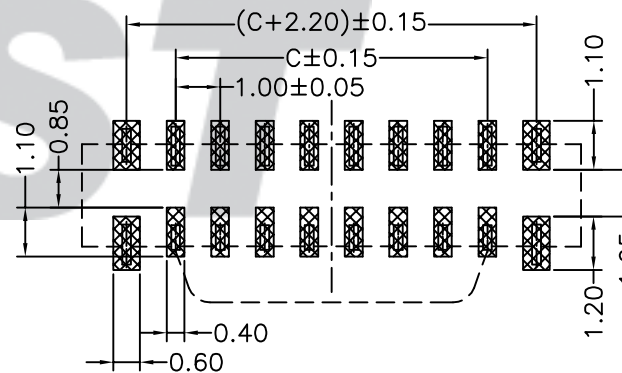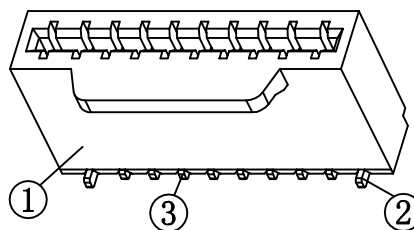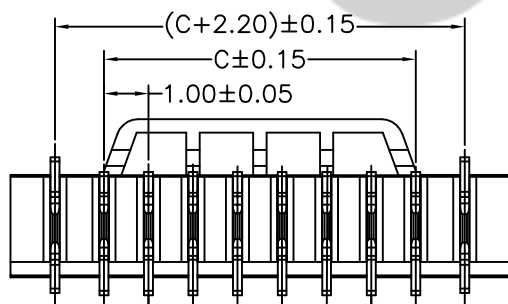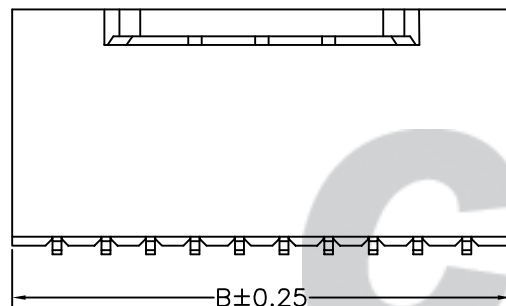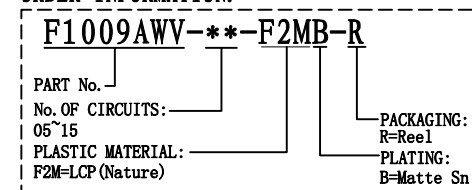

RECOMMENDED PCB LAYOUT (TOP VIEW)

专利产品

REV.	DATE	DESCRIPTION	APPD.
B/0	2016.04.12	NEW RELEASE	

NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
③	Solder Tab	2	Phosphor Bronze	Matte Sn
②	Contacts	5~15	Phosphor Bronze	Matte Sn
①	Insulator	1	LCP (UL94V-0)	Nature (Beige)

Tolerance X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0°	Model Name: 1.00mm PITCH 180° SMT ZIF FFC/FPC Model No: F1009AWV-**-F2MB-R	SCALE: FULL REVISION: B/0
UNIT: mm	CNJST 浙江捷仕泰电子有限公司 ZHEJIANG JIESHITAI ELECTRONIC CO., LTD	

Drawn: 蔡忠忠 2016.04.12
Checked: 林旭芝
Approved: 刘祚杰
DWG NO. CNJST/GCCP-0386