
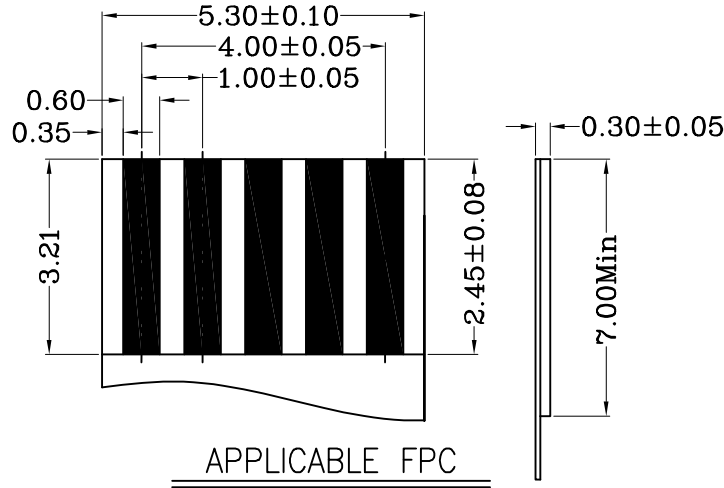


RoHS Compliant

成品图




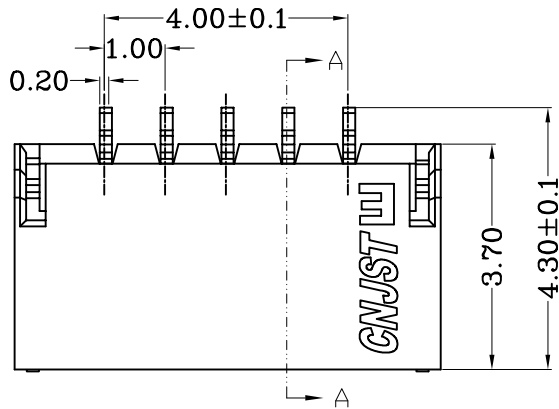


SPECIFICATION

- 1 Contact resistance: $\leq 30m\Omega$
- 2 Insulation resistance: $\geq 500M\Omega$
- 3 Rated voltage: 100 V AC DC
- 4 Rated current: 1.0A AC DC
- 5 Withstand Voltage: 500V AC/minute
- 6 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

F1014AWR-05-F2MB-R		
PART No.		PACKAGING:
No. OF CIRCUITS:		R=REEL
05		PLATING:
PLASTIC MATERIAL:		B=Mattn Sn
F2M=LCP		

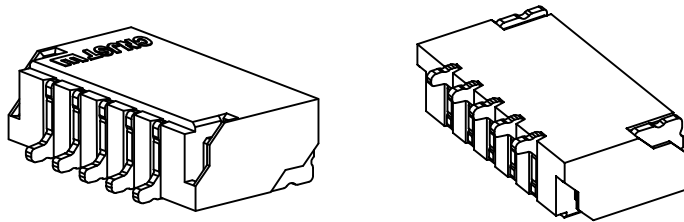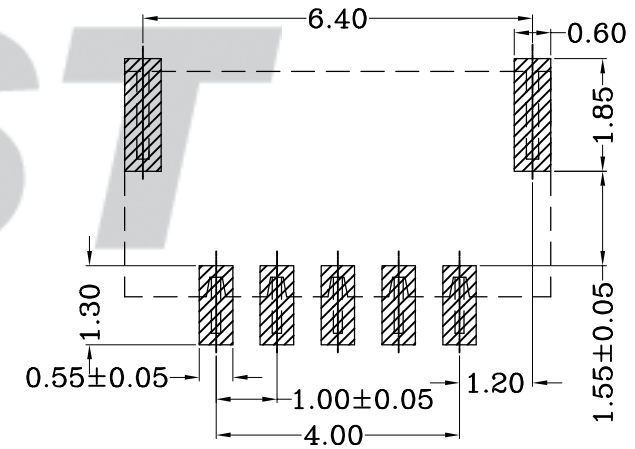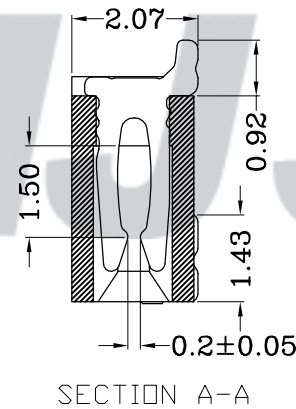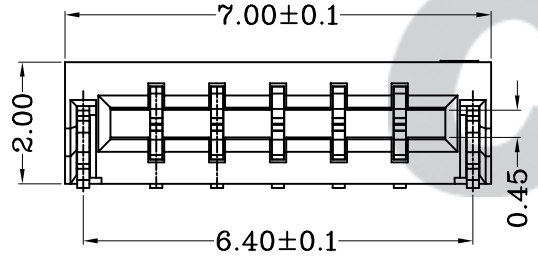

SUGGESTED PCB LAYOUT (TOP VIEW)

专利产品

B/O	2016.04.16	NEW RELEASE	
REV.	DATE	DESCRIPTION	APPD.

③	Solder Tabs	2	Phosphor Bronze	Mattn Sn
②	Material	5	Phosphor Bronze	Mattn Sn
①	Insulator	1	LCP (UL94V-0)	Nature (Beige)
NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR

Tolerance	Model Name: 1.00mm pitch 90° FFC/FPC TYPE	Drawn: 蔡忠忠 2016.04.16	
X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0°	Model No: F1014AWR-05-F2MB-R		
	SCALE: FULL	REVISION: B/0	Checked: 林旭芝
UNIT: mm	CNJST 浙江捷仕泰电子有限公司 ZHEJIANG JIESHITAI ELECTRONIC CO., LTD		Approved: 刘祚杰
			DWG NO. CNJST/GCCP-0428