
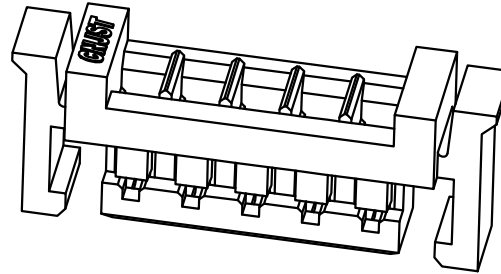
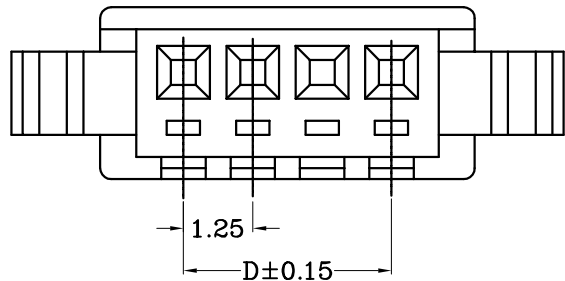
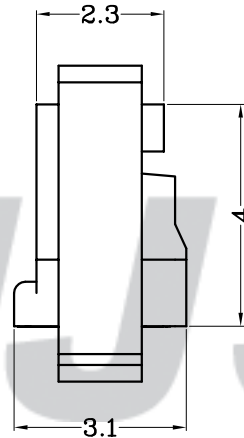
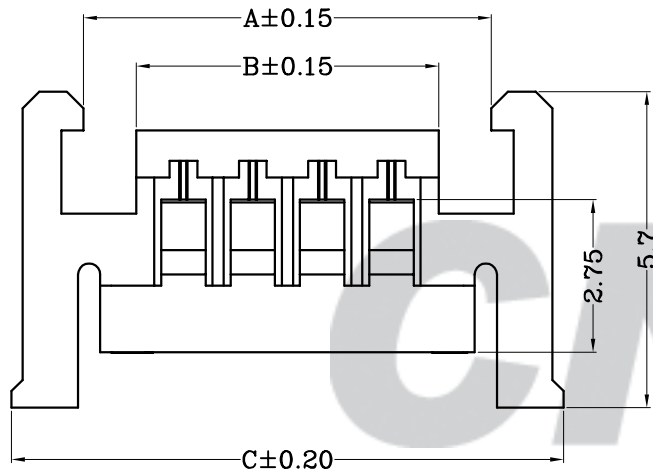


RoHS Compliant

成品图

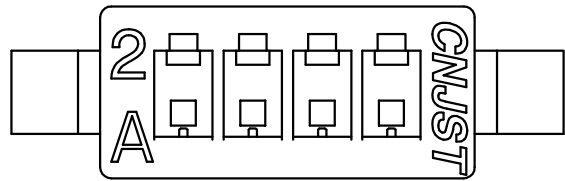

SPECIFICATION

- 1 Contact resistance:  $\leq 30m\Omega$
- 2 Insulation resistance:  $\geq 100M\Omega$
- 3 Rated voltage: 125 V AC DC
- 4 Rated current: 1 A AC DC
- 5 Withstand Voltage: 500V AC/minute
- 6 Temperature Range:  $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

**A12514Y-\*\*-A6W-P**

PART No. \_\_\_\_\_  
 No. OF CIRCUITS: \_\_\_\_\_  
 02~15 \_\_\_\_\_  
 PLASTIC MATERIAL: \_\_\_\_\_  
 A6W:PA66(White) \_\_\_\_\_

PACKAGING:  
P=Pe

Circuits	Dimensions (mm)			
	A	B	C	D
02	4.90	3.05	7.50	--
03	6.15	4.30	8.75	2.50
04	7.40	5.55	10.00	3.75
05	8.65	6.80	11.25	5.00
06	9.90	8.05	12.50	6.25
07	11.15	9.30	13.75	7.50
08	12.40	10.55	15.00	8.75
09	13.65	11.80	16.25	10.00
10	14.90	13.05	17.50	11.25
11	16.15	14.30	18.75	12.50
12	17.40	15.55	20.00	13.75
13	18.65	16.80	21.25	15.00
14	19.90	18.05	22.50	16.25
15	21.15	19.30	23.75	17.50

Unit: mm

Tolerance X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0°	Model Name: 1.25mm pitch HOUSING	Drawn: 张育斌 2016.05.17
	Model No: A12514Y-**-A6W-P	
UNIT: mm	SCALE: FULL	REVISION: B/0
	Checked: 林旭芝	
Approved: 刘祚杰		DWG NO. CNJST/GCCP-0453
ZHEJIANG JIESHITAI ELECTRONIC CO., LTD CNJST 浙江捷仕泰电子有限公司		

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
B/0	2016.04.12	NEW RELEASE		①	Insulator	1	PA66(UL94V-0)	White