




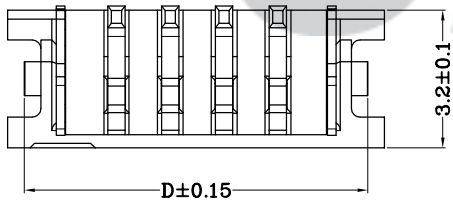
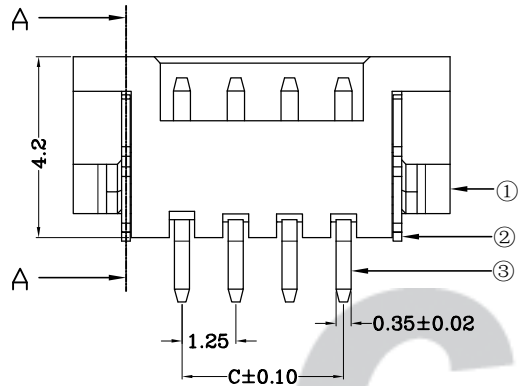


RoHS Compliant

成品图

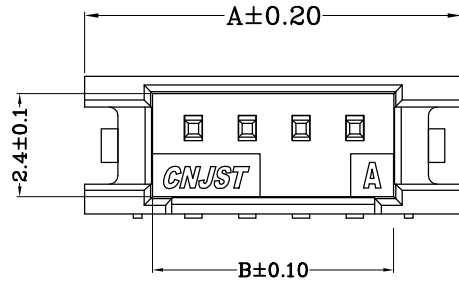

SECTION A-A

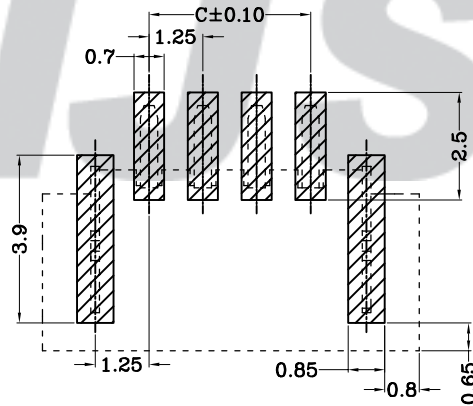

SUGGESTED PCB LAYOUT
(TOP VIEW)

SPECIFICATION

- 1 Contact resistance: $\leq 30m\Omega$
- 2 Insulation resistance: $\geq 100M\Omega$
- 3 Rated voltage: 125 V AC DC
- 4 Rated current: 1 A AC DC
- 5 Withstand Voltage: 500V AC/minute
- 6 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

A12514AWR--F2MB-R**

PART No.:		PACKAGING:	
No. OF CIRCUITS:		G=TUBE	
02~16		R=REEL	
PLASTIC MATERIAL:		PLATING:	
F2M=LCP (Locker:LCP)		B=Mattn Sn	

Circuits	Dimensions (mm)			
	A	B	C	D
02	6.25	3.10	1.25	5.50
03	7.50	4.35	2.50	6.75
04	8.75	5.60	3.75	8.00
05	10.00	6.85	5.00	9.25
06	11.25	8.10	6.25	10.50
07	12.50	9.35	7.50	11.75
08	13.75	10.60	8.75	13.00
09	15.00	11.85	10.00	14.25
10	16.25	13.10	11.25	15.50
11	17.50	14.35	12.50	16.75
12	18.75	15.60	13.75	18.00
13	20.00	16.85	15.00	19.25
14	21.25	18.10	16.25	20.50
15	22.50	19.35	17.50	21.75

B/02016.04.12	NEW RELEASE		
REV.	DATE	DESCRIPTION	APPD.

③	Solder Tabs	2	Brass	Mattn Sn
②	Material	02~15	Phosphor Bronze	Mattn Sn
①	Insulator	1	LCP (UL94V-0)	Nature (Beige)
NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR

Tolerance	Model Name: 1.25mm pitch 90° FFC/FPC TYPE
X.X ±0.30	Model No: A12514AWR-**-F2MB-R
X.XX ±0.20	
X.XXX ±0.10	
Angle ±3.0°	

UNIT: mm

CNJST 浙江捷仕泰电子有限公司
ZHEJIANG JIESHITAI ELECTRONIC CO., LTD

Model Name: 1.25mm pitch 90° FFC/FPC TYPE
Model No: A12514AWR-**-F2MB-R

SCALE: FULL REVISION: B/0

Drawn: 蔡忠忠 2016.04.12

Checked: 林旭芝

Approved: 刘祚杰

DWG NO. CNJST/GCCP-0414