


RoHS Compliant




成品图

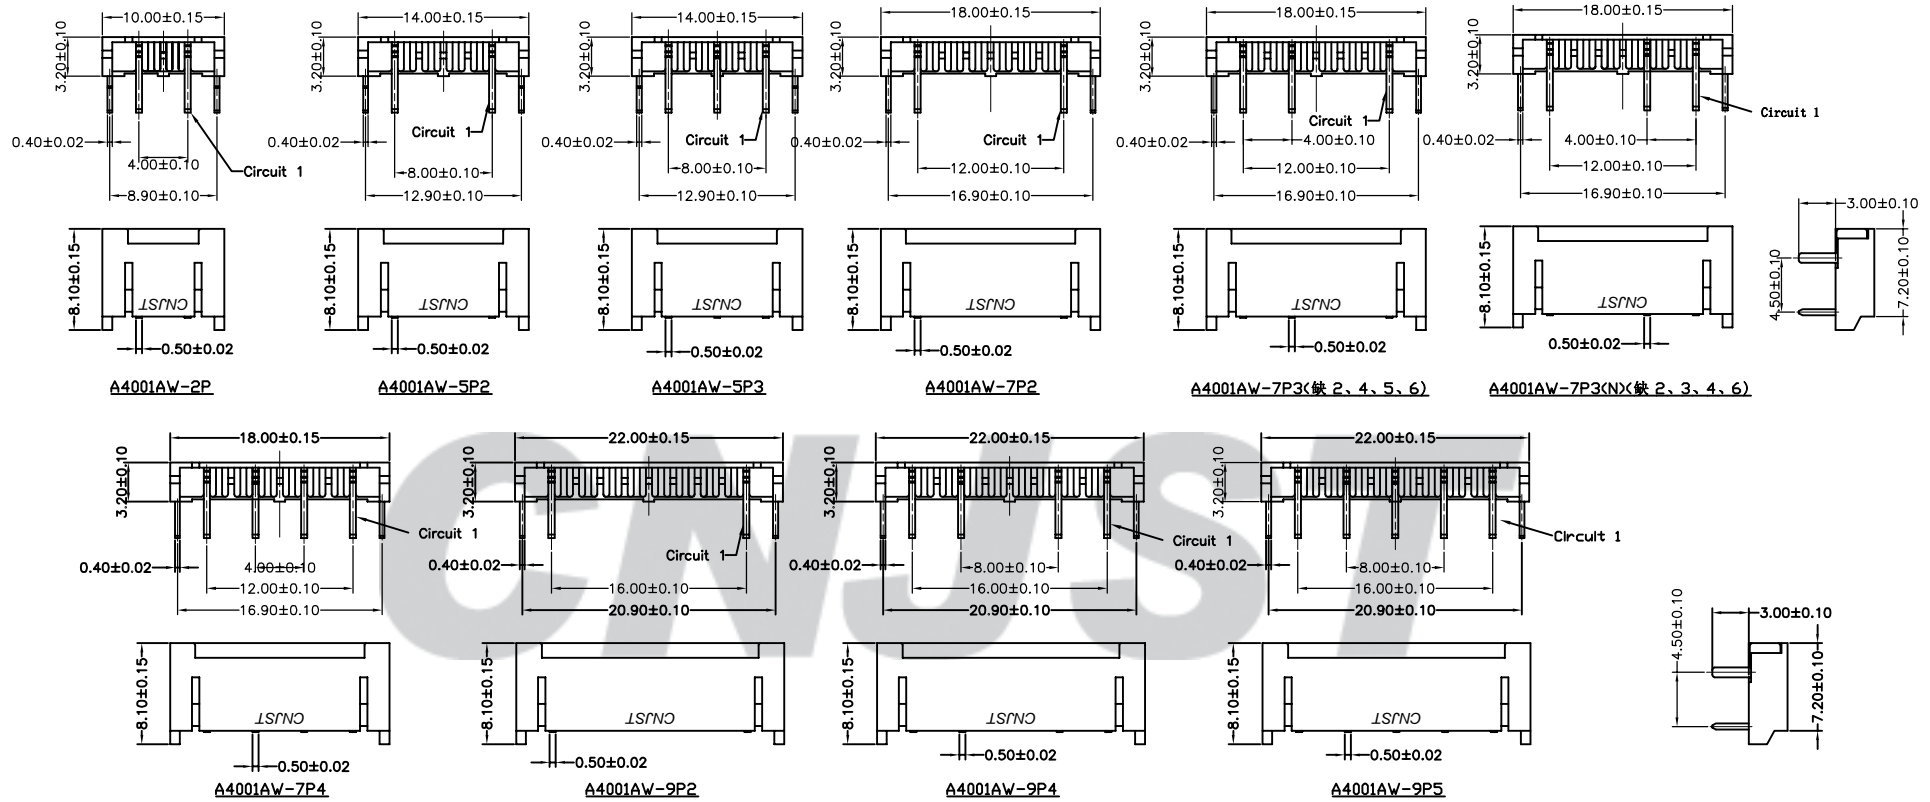

SPECIFICATION

- 1 Contact resistance:  $\leq 10m\Omega$
- 2 Insulation resistance:  $\geq 1000M\Omega$
- 3 Rated voltage: 600 V AC DC
- 4 Rated current: 1.0 A AC DC
- 5 Withstand Voltage: 1800V AC/minute
- 6 Temperature Range:  $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

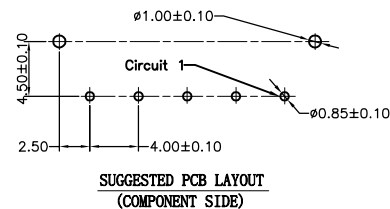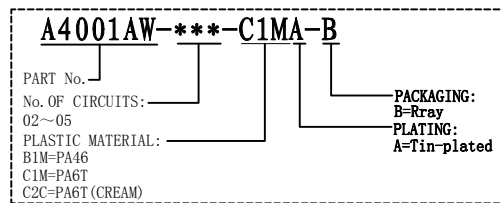

|      |            |             |       |
|------|------------|-------------|-------|
| B/O  | 2016.05.12 | NEW RELEASE |       |
| REV. | DATE       | DESCRIPTION | APPD. |

|     |             |     |                 |               |
|-----|-------------|-----|-----------------|---------------|
| ③   | Solder Tabs | 2   | Phosphor Bronze | Tin-plated    |
| ②   | Contacts    | 2~5 | Phosphor Bronze | Tin-plated    |
| ①   | Insulator   | 1   | PA6T (UL94V-0)  | Nature        |
| NO. | DESCRIPTION | QTY | MATERIAL        | PLATING/COLOR |

|             |  |               |
|-------------|--|---------------|
| Tolerance   | Model Name: 4.00mm PITCH 90° WAFER                                 |               |
| X.X ±0.30   | Model No: A4001AW-***-C1MA-B                                       |               |
| X.XX ±0.20  | SCALE: FULL  | REVISION: B/0 |
| X.XXX ±0.10 | UNIT: mm   |               |
| Angle ±3.0° | <b>CNJST</b> 浙江捷仕泰电子有限公司<br>ZHEJIANG JIESHITAI ELECTRONIC CO., LTD |               |

|                         |
|-------------------------|
| Drawn: 蔡忠忠 2016.05.12   |
| Checked: 林旭芝            |
| Approved: 刘祚杰           |
| DWG NO. CNJST/GCCP-0113 |