


RoHS Compliant



成品图

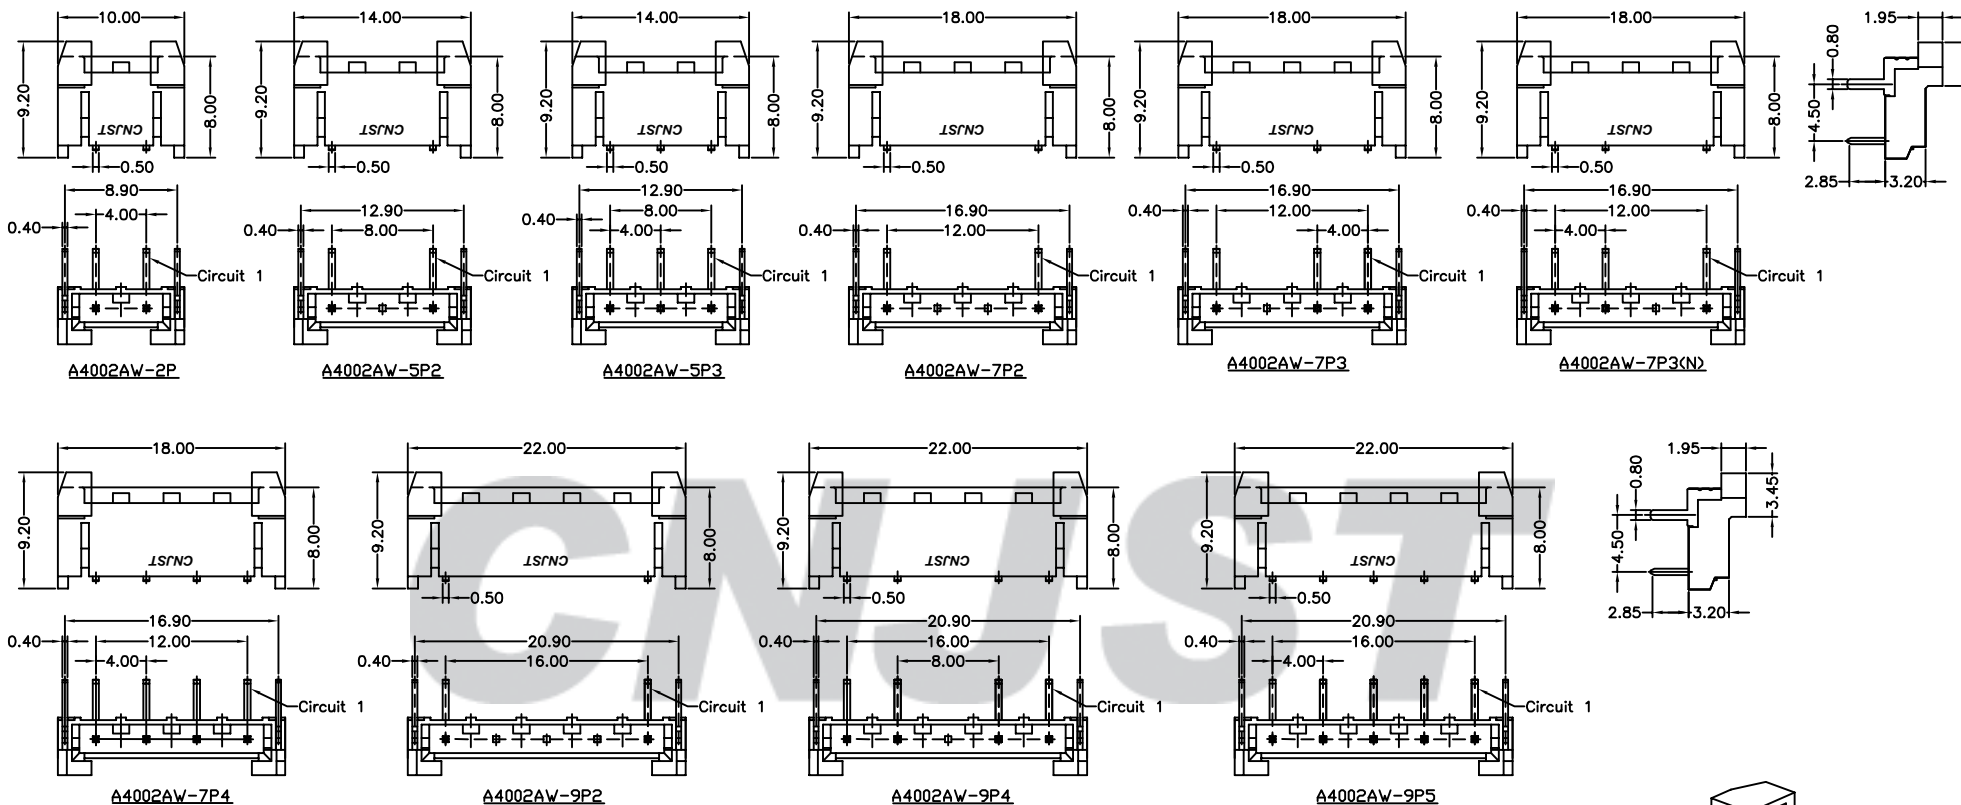


SPECIFICATION

- 1 Contact resistance:  $\leq 10m\Omega$
- 2 Insulation resistance:  $\geq 1000M\Omega$
- 3 Rated voltage: 600 V AC DC
- 4 Rated current: 1.0 A AC DC
- 5 Withstand Voltage: 1800V AC/minute
- 6 Temperature Range:  $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

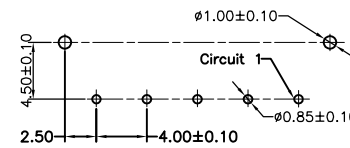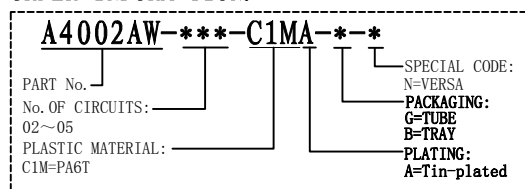

SUGGESTED PCB LAYOUT  
(COMPONENT SIDE)

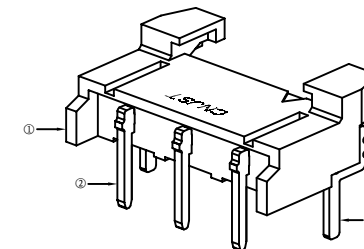

Tolerance X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0°	Model Name: 4.00mm PITCH 90° WAFER Model No: A4002AW-***-C1MA-***	Drawn: 蔡忠忠 2016.05.18
UNIT: mm	SCALE: FULL REVISION: B/0	Checked: 林旭芝
	<b>CNJST</b> 浙江捷仕泰电子有限公司 ZHEJIANG JIESHITAI ELECTRONIC CO., LTD	Approved: 刘祚杰
		DWG NO. CNJST/GCCP-0160

NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
③	Solder Tabs	2	Phosphor Bronze	Tin-plated
②	Contacts	2~5	Phosphor Bronze	Tin-plated
①	Insulator	1	PA6T (UL94V-0)	Nature

REV.	DATE	DESCRIPTION	APPD.
B/0	2016.05.18	NEW RELEASE	