
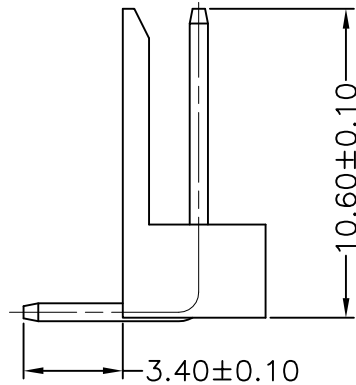


RoHS Compliant

成品图

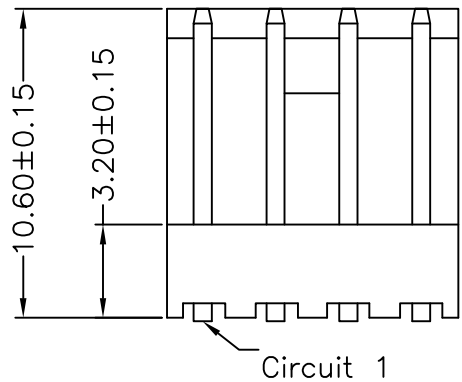

SPECIFICATION

- 1 Contact resistance: $\leq 20m\Omega$
- 2 Insulation resistance: $\geq 1000M\Omega$
- 3 Rated voltage: 250 V AC DC
- 4 Rated current: 2.0 A AC DC
- 5 Withstand Voltage: 800V AC/minute
- 6 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

A2506AW--A5WA-P**

PART No.




No. OF CIRCUITS:

PLASTIC MATERIAL:

A5W=PA66 (WHITE)

PACKAGING: P=PE

PLATING: A=Tin-plated

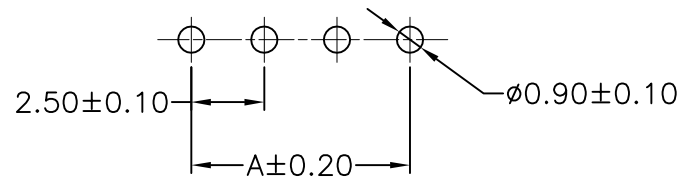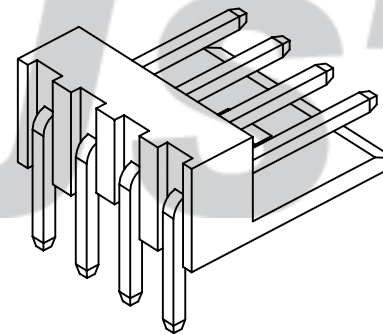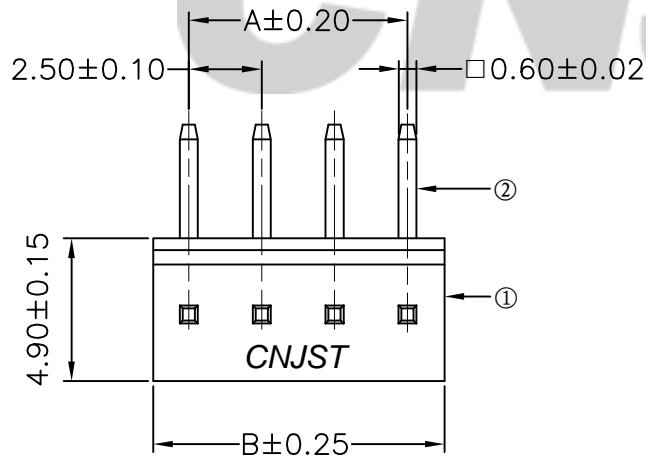

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

Circuits	Dimensions (mm)	
	A	B
02	2.50	5.00
03	5.00	7.50
04	7.50	10.00
05	10.00	12.50
06	12.50	15.00
07	15.00	17.50
08	17.50	20.00
09	20.00	22.50
10	22.50	25.00
11	25.00	27.50
12	27.50	30.00

REV.	DATE	DESCRIPTION	APPD.
B/0	2016.06.11	NEW RELEASE	

NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
②	Contacts	2~12	Brass	Tin-plated
①	Insulator	1	PA66 (UL94V-0)	White

Tolerance
 X.X ±0.30
 X.XX ±0.20
 X.XXX ±0.10
 Angle ±3.0°

Model Name: 2.50mm PITCH 90° WAFER
 Model No: A2506AW-**-A5WA-P

UNIT: mm

SCALE: FULL REVISION: B/0

CNJST 浙江捷仕泰电子有限公司
 ZHEJIANG JIESHITAI ELECTRONIC CO., LTD

Drawn: 蔡忠忠 2016.06.11

Checked: 林旭芝

Approved: 刘祚杰

DWG NO. CNJST/GCCP-0196