
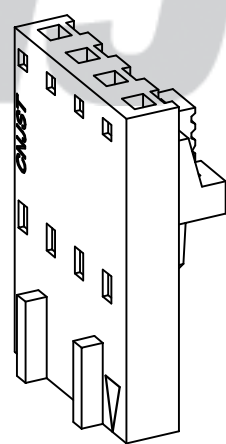
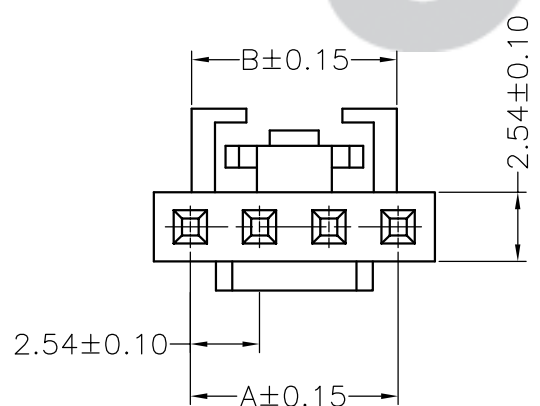
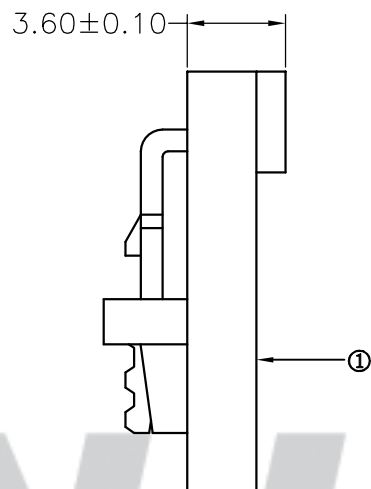


RoHS Compliant

成品图

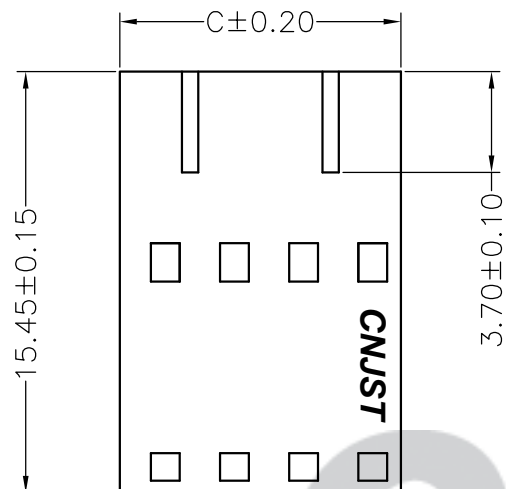

SPECIFICATION

- 1 Contact resistance:  $\leq 20m\Omega$
- 2 Insulation resistance:  $\geq 1000M\Omega$
- 3 Rated voltage: 250 V AC DC
- 4 Rated current: 2.5 A AC DC
- 5 Withstand Voltage: 800V AC/minute
- 6 Temperature Range:  $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

**A2542Y-\*\*-A8K-P**

PART No. \_\_\_\_\_ PACKAGING: P=PE  
 No. OF CIRCUITS: \_\_\_\_\_ PLASTIC MATERIAL: A8K=PA66 (BLACK)  
 02~12

Circuits	Dimensions (mm)		
	A	B	C
02	2.54	2.44	5.08
03	5.08	4.98	7.62
04	7.62	7.52	10.16
05	10.16	10.06	12.70
06	12.70	12.60	15.24
07	15.24	15.14	17.78
08	17.78	17.68	20.32
09	20.32	20.22	22.86
10	22.86	22.76	25.40
11	25.40	25.30	27.94
12	27.94	27.84	30.48

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
B/0	2016.05.10	NEW RELEASE		①	Insulator	1	PA66 (UL94V-0)	Black

Tolerance  
 X.X ±0.30  
 X.XX ±0.20  
 X.XXX ±0.10  
 Angle ±3.0°

Model Name: 2.54mm PITCH HOUSING  
 Model No: A2542Y-\*\*-A8K-P

SCALE: FULL REVISION: B/0

UNIT: mm

**CNJST** 浙江捷仕泰电子有限公司  
 ZHEJIANG JIESHITAI ELECTRONIC CO., LTD

Drawn: 蔡忠忠 2016.05.10  
 Checked: 林旭芝  
 Approved: 刘祚杰  
 DWG NO. CNJST/GCCP-0092