
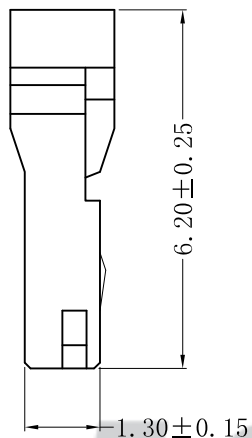


RoHS Compliant

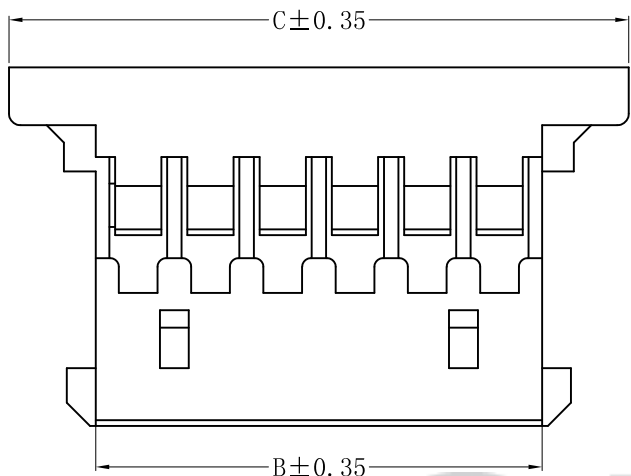



SPECIFICATION

- 1 Contact resistance: $\leq 20m\Omega$
- 2 Insulation resistance: $\geq 100M\Omega$
- 3 Rated voltage: 200 V AC DC
- 4 Rated current: 1.0 A AC DC
- 5 Withstand Voltage: 500V AC/minute
- 6 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$


ORDER INFORMATION:

A1253Y--A6W-P**

PART No.	PACKAGING: P=PE
No. OF CIRCUITS: 02~06	PLASTIC MATERIAL: A6W=PA66 (WHITE)

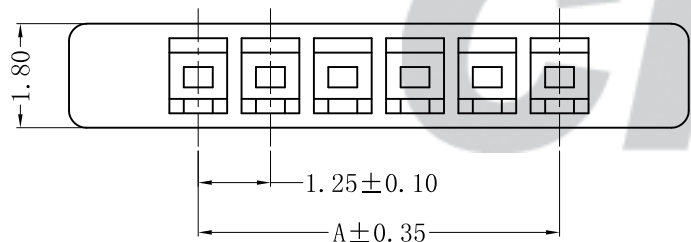


3P



2P

Circuits	Dimensions (mm)		
	A	B	C
02	1.25	2.72	5.72
03	2.50	3.97	6.97
04	3.75	5.22	8.22
05	5.00	6.47	9.47
06	6.25	7.72	10.72

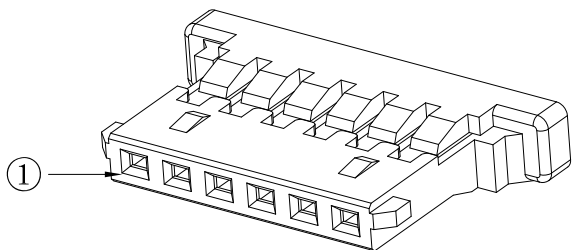

Tolerance X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0°	CNJST 捷仕泰企业		Drawn: 王丽君 2022. 11. 30
	Model No. :A1253Y-**-A6W-P		Checked: 吴丹平
	Model Name:1.25mm PITCH HOUSING		Approved: 林旭芝
	UNIT: mm	SCALE:FULL REVISION:C/0	DWG NO.CNJST/GCCP-0033

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
C/0	2022. 11. 30	统一标准 更新模板	王丽君	①	Insulator	1	PA66 (UL94V-0)	White