

RoHS Compliant

SPECIFICATION


- 1 Contact resistance: $\leq 20m\Omega$
- 2 Insulation resistance: $\geq 100M\Omega$
- 3 Rated voltage: 200 V AC DC
- 4 Rated current: 1.0 A AC DC
- 5 Withstand Voltage: 500V AC/minute
- 6 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

A1253AWR--C1MB-R**






PART No.:		PACKAGING:
No. OF CIRCUITS:		G=TUBE
		R=Reel
PLASTIC MATERIAL:		PLATING:
C1M=FR52 (Nature)		A=Tin-plated
		B=Matte Sn

Circuits	Dimensions		
	A	B	C
02	1.25	3.80	7.65
03	2.50	5.05	8.90
04	3.75	6.30	10.00
05	5.00	7.55	11.40
06	6.25	8.80	12.65

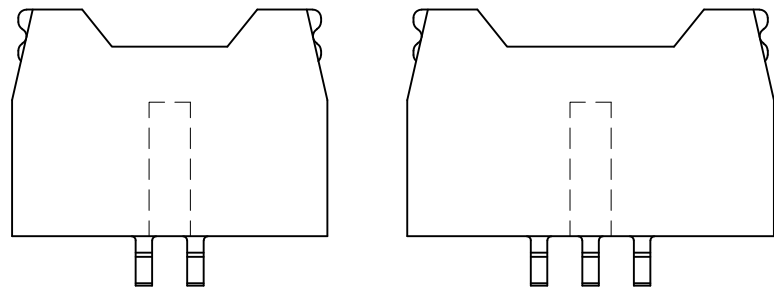

2P

3P

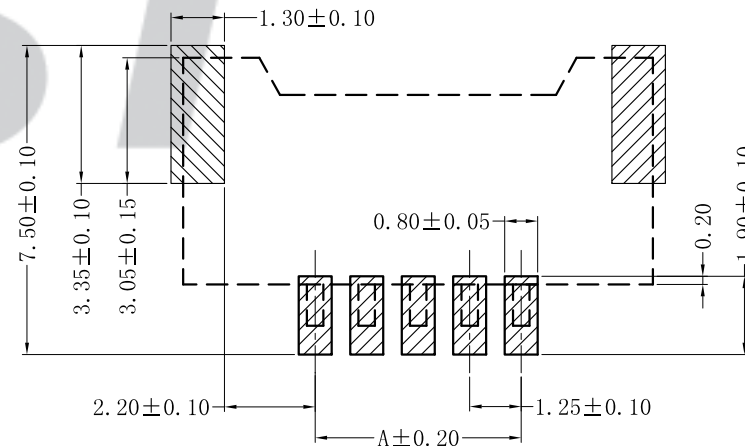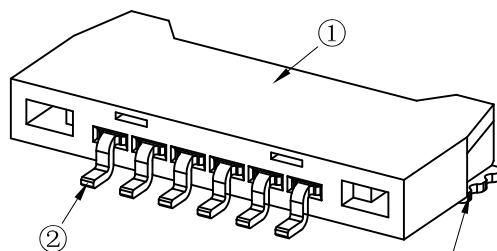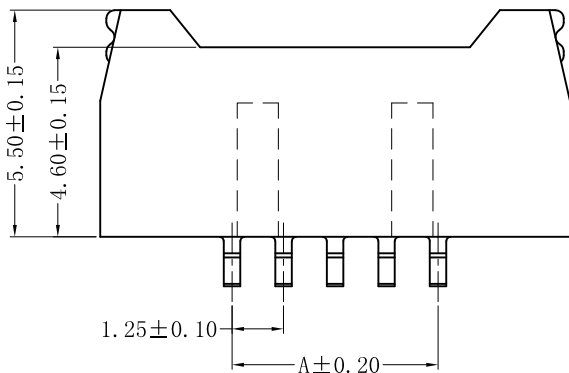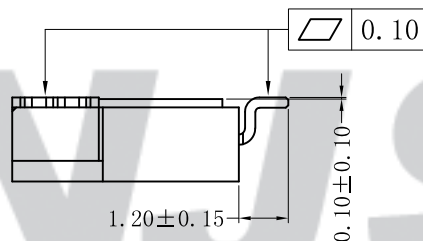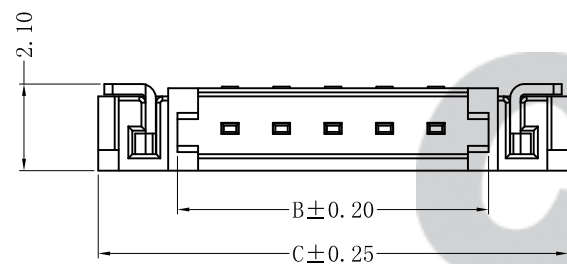

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

专利产品

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
C/O	2022. 11. 30	统一标准 更新模板	王丽君	③	Solder Tab	2	Phosphor Bronze	Matte Sn
B/O	2018. 01. 16	NEW RELEASE	王程伟	②	Contacts	2~6	Phosphor Bronze	Matte Sn
				①	Insulator	1	FR52 (UL94V-0)	Nature

Tolerance	
X.X	± 0.30
X.XX	± 0.20
X.XXX	± 0.10
Angle	$\pm 3.0^{\circ}$
UNIT:	mm

CNJST 捷仕泰企业

Model No.: A1253AWR-**-C1MB-R

Model Name: 1.25mm PITCH 90° WAFER-SMT TYPE

SCALE: FULL REVISION: C/0

Drawn: 王丽君 2022. 11. 30
Checked: 吴丹平
Approved: 林旭芝
DWG NO. CNJST/GCCP-0032