


RoHS Compliant




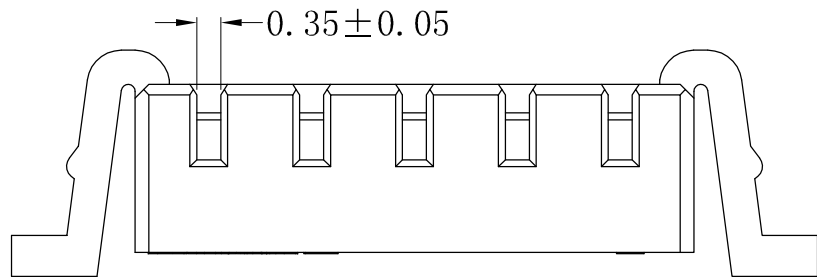


SPECIFICATION

- 1 Contact resistance: $\leq 30m\Omega$
- 2 Insulation resistance: $\geq 1000M\Omega$
- 3 Rated voltage: 125 V AC DC
- 4 Rated current: 0.75 A AC DC
- 5 Withstand Voltage: 500V AC/minute
- 6 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

| | | |
|------------------------|------------------|------------|
| A1504Y-05-A6W-P | | |
| PART No. | | PACKAGING: |
| No. OF CIRCUITS: | 05 | P=PE |
| PLASTIC MATERIAL: | A6W=PA66 (WHITE) | |

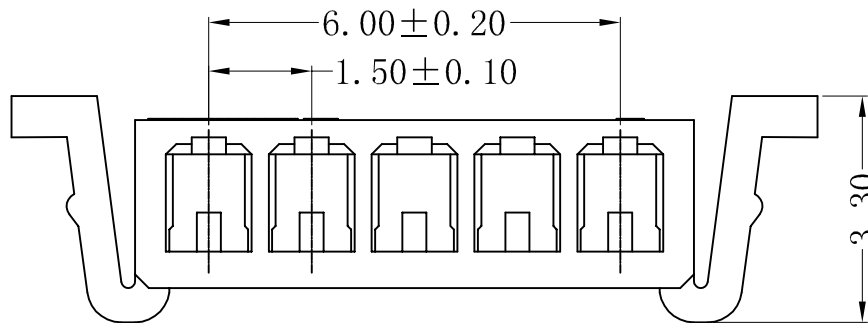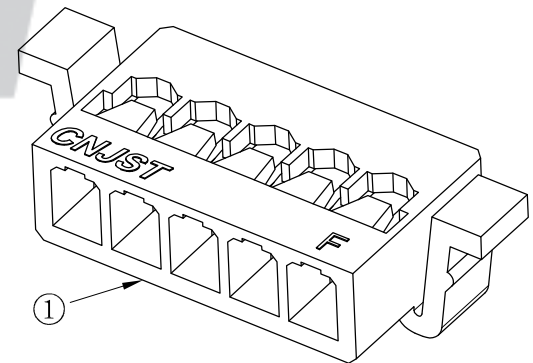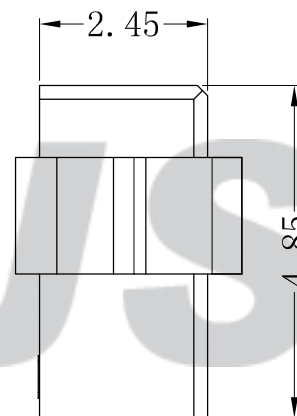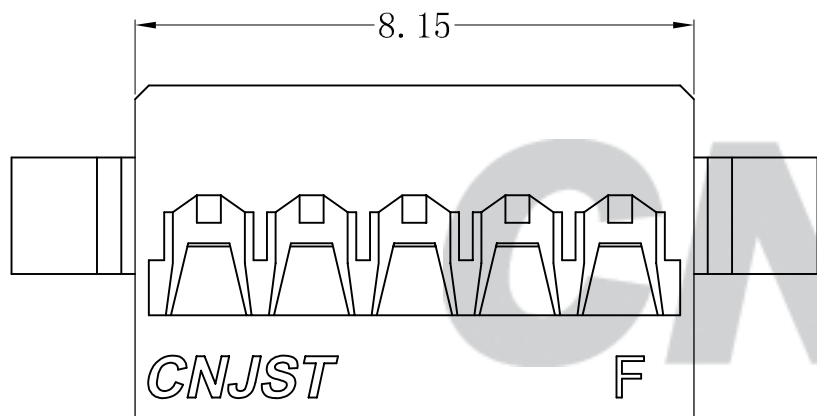

专利产品

| | | | |
|--|----------------------------------|-------------|-----------------------|
| Tolerance X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0° UNIT: mm | CNJST 捷仕泰企业 | | Drawn: 黄美程 2022.07.20 |
| | Model No.: A1504Y-05-A6W-P | | Checked: 吴丹平 |
| | Model Name: 1.50mm pitch Housing | | Approved: 林旭芝 |
| | | SCALE: FULL | REVISION: C/0 |

| REV. | DATE | DESCRIPTION | APPD. | NO. | DESCRIPTION | QTY | MATERIAL | PLATING/COLOR |
|------|------------|-------------|-------|-----|-------------|-----|----------------|---------------|
| C/0 | 2022.07.20 | 统一标准 更新模版 | 黄美程 | | | | | |
| B/0 | 2019.08.07 | NEW RELEASE | 王炜彬 | ① | Insulator | 1 | PA66 (UL94V-0) | White |