

RoHS Compliant





SPECIFICATION

- 1 Contact resistance: $\leq 20m\Omega$
- 2 Insulation resistance: $\geq 1000M\Omega$
- 3 Rated voltage: 200 V AC DC
- 4 Rated current: 2.0 A AC DC
- 5 Withstand Voltage: 800V AC/minute
- 6 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

A2001Y--A6W-P**

PART No. _____ PACKAGING: P=PE
No. OF CIRCUITS: _____ PLASTIC MATERIAL: A6W=PA66 (WHITE)
02~16

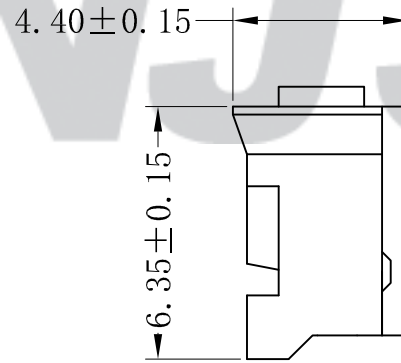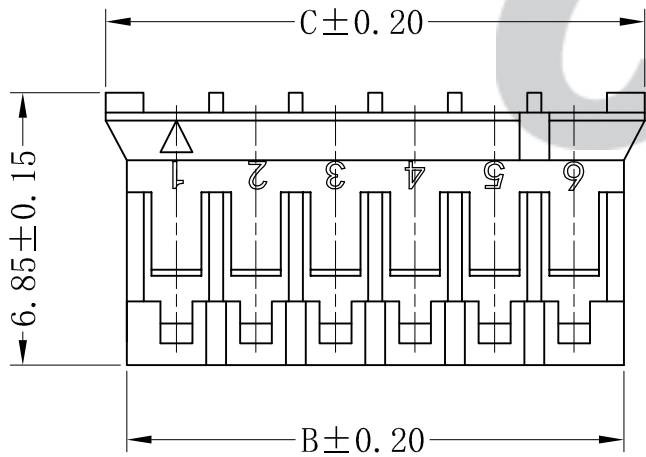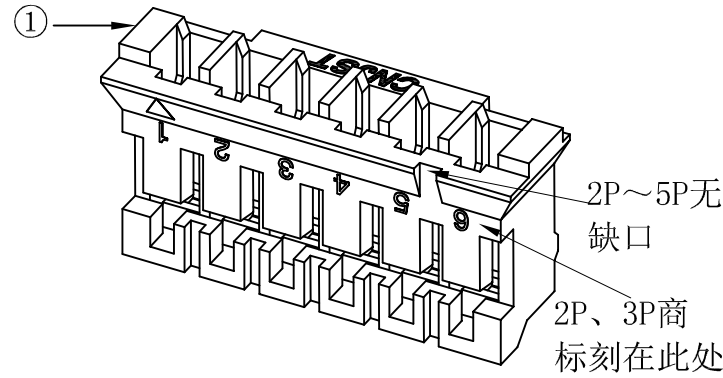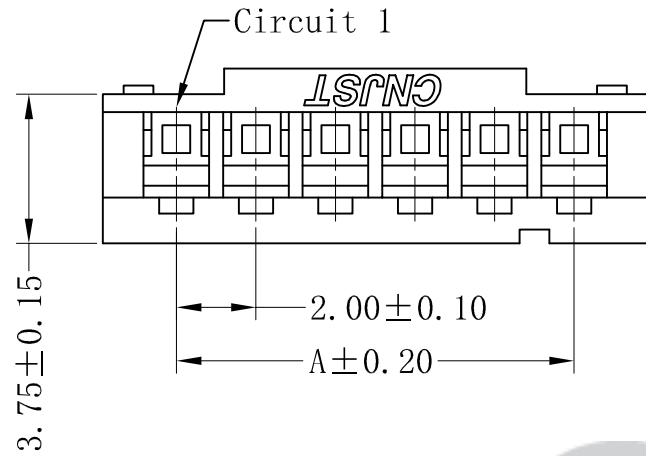

Circuits	Dimensions (mm)		
	A	B	C
02	2.00	4.50	5.70
03	4.00	6.50	7.70
04	6.00	8.50	9.70
05	8.00	10.50	11.70
06	10.00	12.50	13.70
07	12.00	14.50	15.70
08	14.00	16.50	17.70
09	16.00	18.50	19.70
10	18.00	20.50	21.70
11	20.00	22.50	23.70
12	22.00	24.50	25.70
13	24.00	26.50	27.70
14	26.00	28.50	29.70
15	28.00	30.50	31.70
16	30.00	32.50	33.70

专利产品

Tolerance	X.X ± 0.30
	X.XX ± 0.20
	X.XXX ± 0.10
	Angle ± 3.0°

CNJST 捷仕泰企业

Drawn: 黄美程 2022.08.01

Model No.: A2001Y-**-A6W-P

Checked: 吴丹平

Model Name: 2.00mm PITCH HOUSING

Approved: 林旭芝

UNIT: mm



SCALE: FULL

REVISION: C/0

DWG NO.: CNJST/GCCP-0051

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
C/0	2022.08.01	统一标准 更新模版	黄美程					
B/0	2020.01.09	NEW RELEASE	黄金林	①	Insulator	1	PA66 (UL94V-0)	White