

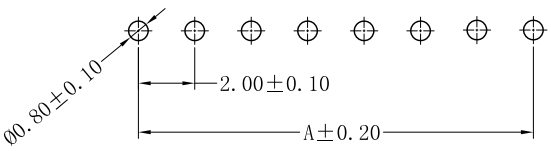
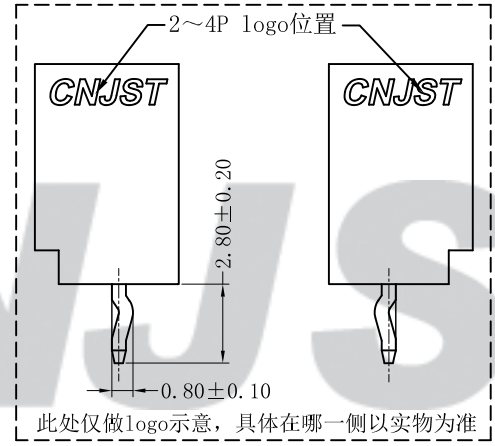
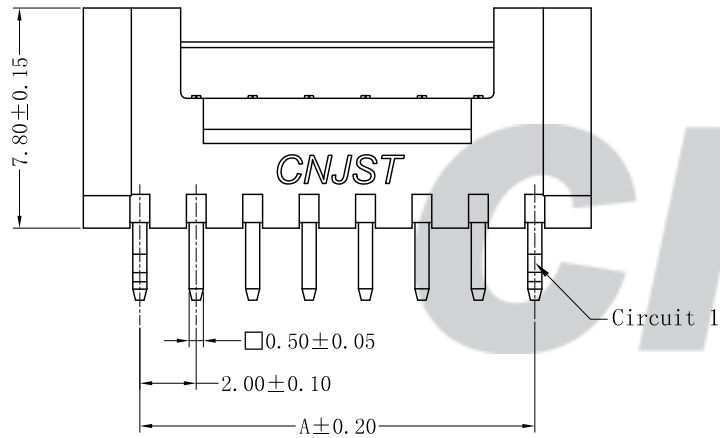



RoHS Compliant

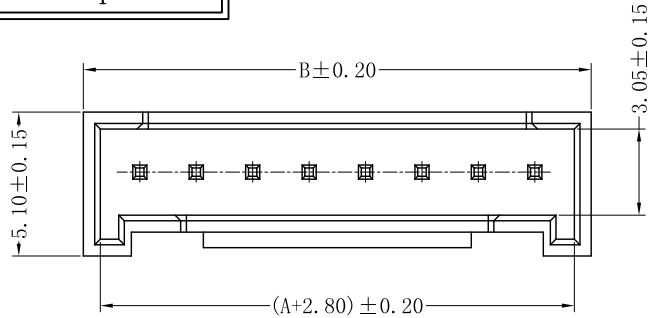

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

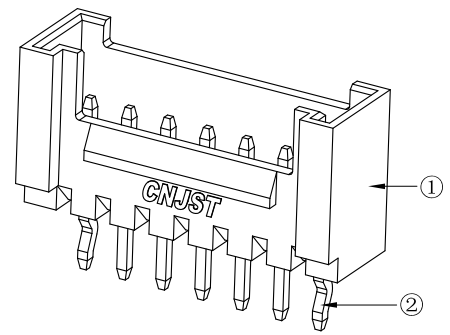

SPECIFICATION

- 1 Contact resistance: $\leq 20m\Omega$
- 2 Insulation resistance: $\geq 1000M\Omega$
- 3 Rated voltage: 250 V AC DC
- 4 Rated current: 3.0 A AC DC
- 5 Withstand Voltage: 1000V AC/minute
- 6 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

A2004A--A1MA-P-D**

PART No.:			
No. OF CIRCUITS:	02~16	PACKAGING:	P=PE
PLASTIC MATERIAL:	A1M=PA66 (Nature)	PLATING:	A=Tin-plated

Circuits	Dimensions (mm)	
	A	B
02	2.00	6.00
03	4.00	8.00
04	6.00	10.00
05	8.00	12.00
06	10.00	14.00
07	12.00	16.00
08	14.00	18.00
09	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00
16	30.00	34.00

专利产品

Tolerance
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±3.0°

CNJST 捷仕泰企业


Model No.: A2004A-**-A1MA-P-D

Model Name: 2.00mm PITCH 180° WAFER

Drawn: 王丽君	2023.06.13
Checked: 吴丹平	
Approved: 林旭芝	
DWG NO. CNJST/GCCP-0061	

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
C/1	2023.06.13	增加2~4P logo位置说明	王丽君	②	Contacts	2~16	Brass	Tin-plated
C/0	2022.07.10	统一标准, 更新模板	王程伟	①	Insulator	1	PA66 (UL94V-0)	Nature

UNIT: mm



SCALE: FULL REVISION: C/1