RoHS Compliant

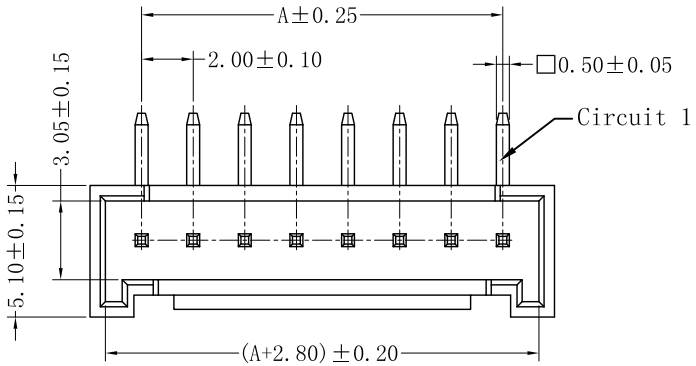



2P

SPECIFICATION

1 Contact resistance: ≤20mΩ
2 Insulation resistance: ≥1000MΩ
3 Rated voltage: 250 V AC DC
4 Rated current: 3.0 A AC DC
5 Withstand Voltage: 1000V AC/minute
6 Temperature Range:-25℃～+85℃

ORDER INFORMATION:

A2004AWD-**-A1MA-*-D

- PART No.
- No. OF CIRCUITS: 02～15
- PLASTIC MATERIAL: A1M=PA66
- C1
- PACKAGING: P=PE(2～4PIN) B=Tray(5～15PIN)
- PLATING: A=Tin-plated

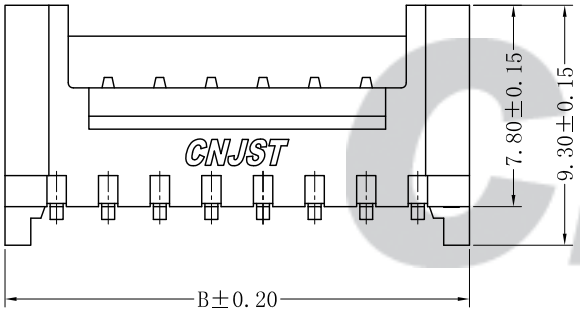

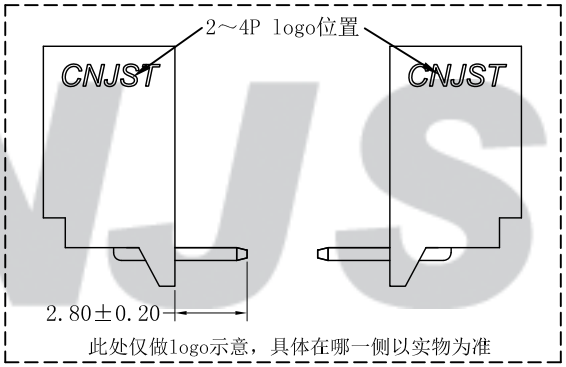

此处仅做logo示意，具体在哪一侧以实物为准

Circuits	Dimensions(mm)	
	A	B
02	2.00	6.00
03	4.00	8.00
04	6.00	10.00
05	8.00	12.00
06	10.00	14.00
07	12.00	16.00
08	14.00	18.00
09	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00

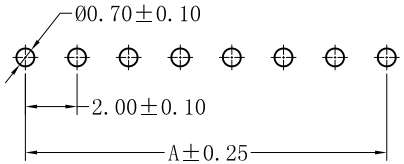

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

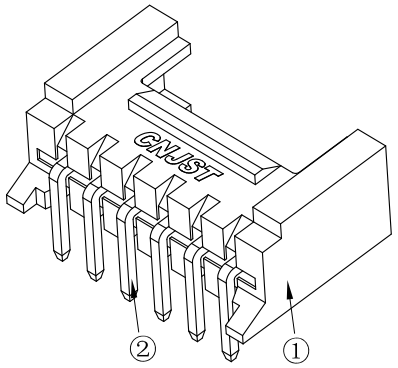

专利产品

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
C/2	2023.06.13	增加2～4P logo位置说明	王丽君					
C/1	2022.10.12	增加包装方式说明	黄美程	②	Contacts	2～15	Brass	Tin-plated
C/0	2022.07.10	统一标准，更新模板	王程伟	①	Insulator	1	PA66(UL94V-0)	Nature

Tolerance
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±3.0°

UNIT: mm

CNJST 捷仕泰企业

Model No.:A2004AWD-**-A1MA-*-D
Model Name:2.00mm PITCH 90° WAFER

SCALE:FULL | REVISION:C/2

Drawn: 王丽君 2023.06.13
Checked: 吴丹平
Approved: 林旭芝
DWG NO.CNJST/GCCP-0062