




RoHS Compliant

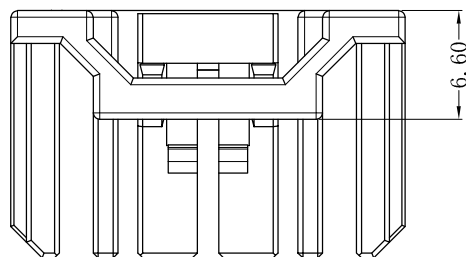

2X7~2X20



2X4



2X5~2X6


SPECIFICATION

- 1 Contact resistance:  $\leq 25m\Omega$
- 2 Insulation resistance:  $\geq 100M\Omega$
- 3 Rated voltage: 50 V AC DC
- 4 Rated current: 3.0 A AC DC
- 5 Withstand Voltage: 500V AC/minute
- 6 Temperature Range:  $-40^{\circ}C \sim +125^{\circ}C$


ORDER INFORMATION:

**QA2007Y-\*\*\*-E2K-B-\*-ZP**



|                              |  |
|------------------------------|--|
| PART No.                     | VERSIONS:<br>A, B  |
| No. OF CIRCUITS:<br>2X4~2X20 | PACKAGING:<br>B=TRAY<br>PLASTIC MATERIAL:<br>E2K=PBT (Black) |

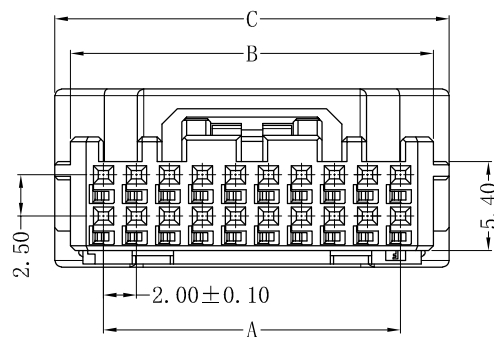



产品: A版本

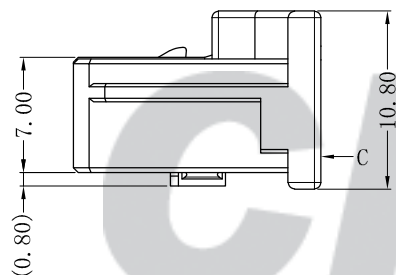

① 产品: B版本

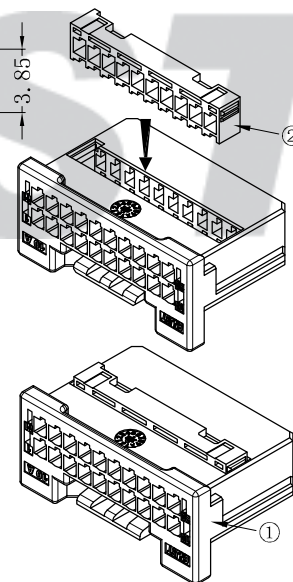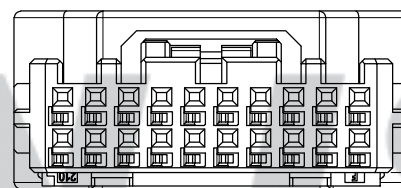

| Circuits   | Dimensions (mm) |       |       |
|------------|-----------------|-------|-------|
|            | A               | B     | C     |
| 204 (2X4)  | 6.00            | 9.90  | 11.90 |
| 205 (2X5)  | 8.00            | 11.90 | 13.90 |
| 206 (2X6)  | 10.00           | 13.90 | 15.90 |
| 207 (2X7)  | 12.00           | 15.90 | 17.90 |
| 208 (2X8)  | 14.00           | 17.90 | 19.90 |
| 210 (2X10) | 18.00           | 21.90 | 23.90 |
| 212 (2X12) | 22.00           | 25.90 | 27.90 |
| 214 (2X14) | 26.00           | 29.90 | 31.90 |
| 216 (2X16) | 30.00           | 33.90 | 35.90 |
| 220 (2X20) | 38.00           | 43.90 | 45.90 |

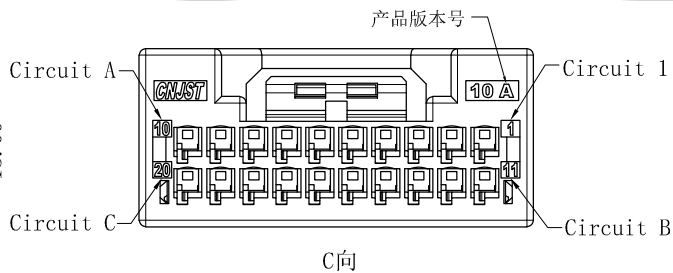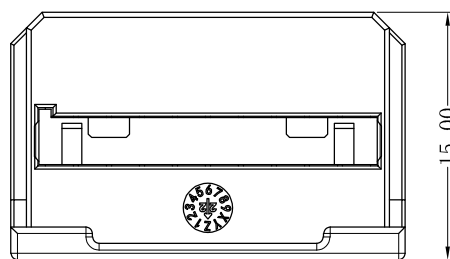

注: 建议客户优先选择我司公母端产品配套使用, 若在没有使用我司公母端配套产品情况下, 出现因产品不匹配的质量问题, 我司将不承担任何风险及责任。


专利产品

|  |                                   |               |                         |
|--|-----------------------------------|---------------|-------------------------|
| Tolerance<br>X.X ±0.30<br>X.XX ±0.20<br>X.XXX ±0.10<br>Angle ±3.0° | <b>CNJST 捷仕泰企业</b>                |               | Drawn: 黄美程 2023.08.02   |
|  | Model No.: QA2007Y-***-E2K-B-*-ZP |               | Checked: 吴丹平            |
| UNIT: mm   | Model Name: 2.00mm PITCH HOUSING  | Approved: 林旭芝 | DWG NO. CNJST/GCCP-0831 |
|  | SCALE: FULL                       | REVISION: C/1 |                         |


| REV. | DATE       | DESCRIPTION | APPD. | NO.       | DESCRIPTION | QTY           | MATERIAL | PLATING/COLOR |
|------|------------|-------------|-------|-----------|-------------|---------------|----------|---------------|
| C/1  | 2023.08.02 | 增加B版本信息     | 黄美程 ② | Locker    | 1           | PBT (UL94V-0) | White    |               |
| C/0  | 2023.05.23 | NEW RELEASE | 黄美程 ① | Insulator | 1           | PBT (UL94V-0) | Black    |               |

RoHS Compliant


# PIN位结构示意图




204




205




206




207




208




210

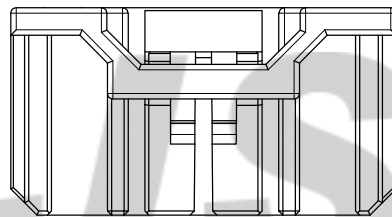


212

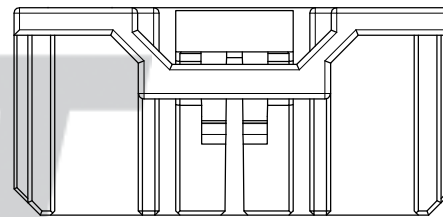

214

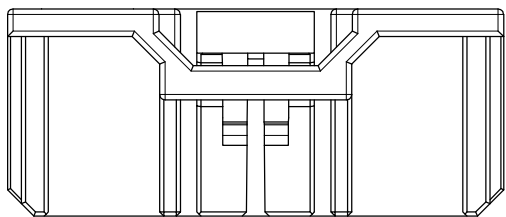

216

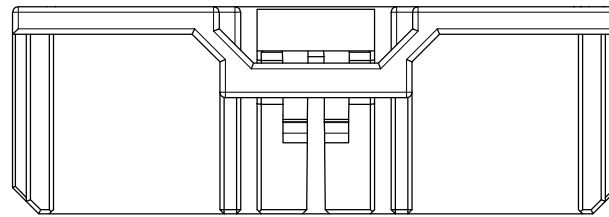

220

注：建议客户优先选择我司公母端产品配套使用，若在没有使用我司公母端配套产品情况下，出现因产品不匹配的质量问题，我司将不承担任何风险及责任。

|      |              |             |       |
|------|--------------|-------------|-------|
| C/1  | 2023. 08. 02 | 增加B版本信息     | 黄羨程   |
| C/0  | 2023. 05. 23 | NEW RELEASE | 黄羨程   |
| REV. | DATE         | DESCRIPTION | APPD. |

|  |                                   |             |                         |
|--|-----------------------------------|-------------|-------------------------|
| Tolerance<br>X.X ±0.30<br>X.XX ±0.20<br>X.XXX ±0.10<br>Angle ±3.0° | <b>CNJST</b> 捷仕泰企业                |             | Drawn: 黄羨程 2023.08.02   |
|  | Model No.: QA2007Y-***-E2K-B-*-ZP |             | Checked: 吴丹平            |
| UNIT: mm   | Model Name: 2.00mm PITCH HOUSING  |             | Approved: 林旭芝           |
|  |                                   | SCALE: FULL | REVISION: C/1           |
|  |                                   |             | DWG NO. CNJST/GCCP-0831 |

专利产品