



RoHS Compliant

成品图

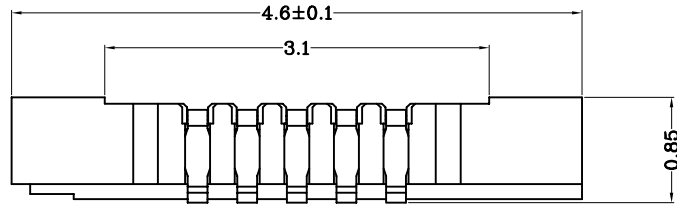



SPECIFICATION

- 1 Contact resistance: $\leq 30m\Omega$
- 2 Insulation resistance: $\geq 500M\Omega$
- 3 Rated voltage: 50 V AC DC
- 4 Rated current: 0.3A AC DC
- 5 Withstand Voltage: 250V AC/minute
- 6 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

B0401M-205-F2KC-R

PART No.		PACKAGING:
No. OF CIRCUITS:	205	R=REEL
PLASTIC MATERIAL:	F2K=LCP (BLACK)	PLATING:
		C=Gold-Plated

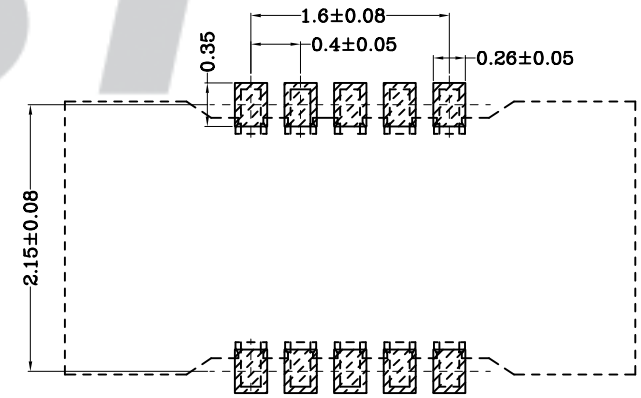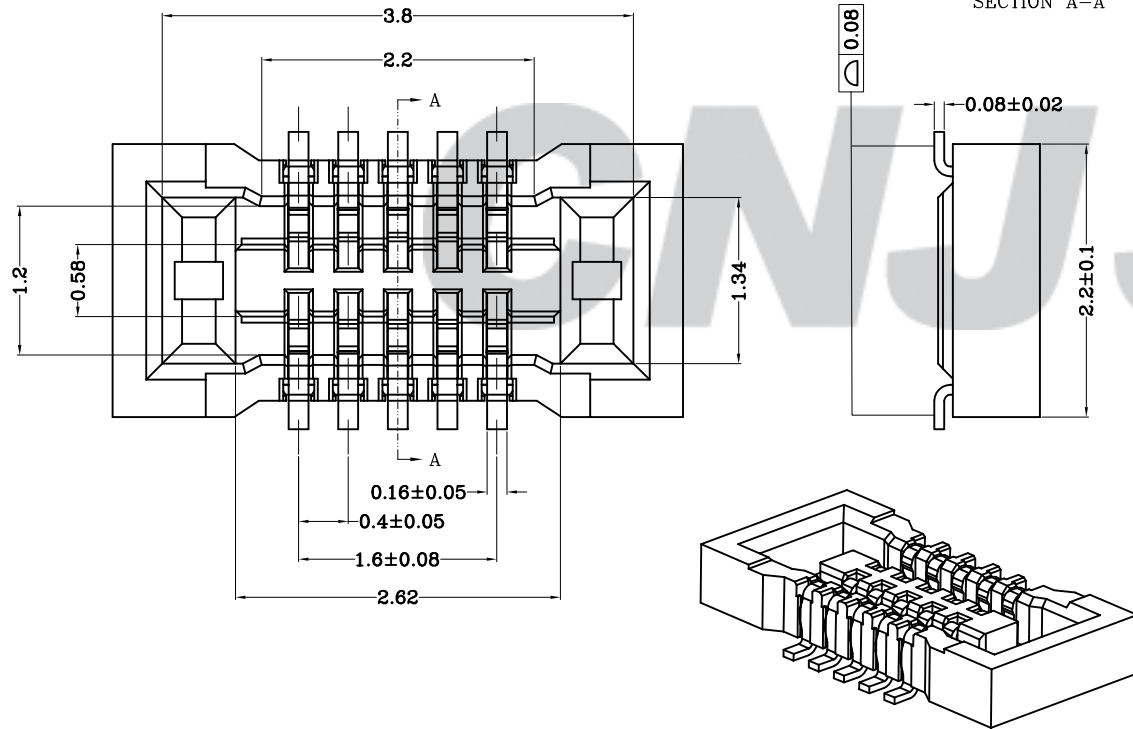

SUGGESTED PCB LAYOUT
(TOP VIEW)

Tolerance X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0°	Model Name: 0.40mm pitch BTB MALE SMT TYPE	Drawn: 张育斌 2016.05.17
	Model No: B0401M-205-F2KC-R	
	SCALE: FULL	REVISION: B/0
	CNJST 浙江捷仕泰电子有限公司 ZHEJIANG JIESHITAI ELECTRONIC CO., LTD	
UNIT: mm		Checked: 林旭芝
		Approved: 刘祚杰
		DWG NO. CNJST/GCCP-0478

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
B/0	2016.04.12	NEW RELEASE		②	Material	10	Phosphor Bronze	Gold-Plated
				①	Insulator	1	LCP (UL94V-0)	Nature (Black)