

RoHS Compliant






成品图

SPECIFICATION

- 1 Contact resistance:  $\leq 20m\Omega$
- 2 Insulation resistance:  $\geq 1000M\Omega$
- 3 Rated voltage: 250 V AC DC
- 4 Rated current: 2.0 A AC DC
- 5 Withstand Voltage: 1000V AC/minute
- 6 Temperature Range:  $-25^{\circ}C \sim +105^{\circ}C$

ORDER INFORMATION:

<b>T3201M-02-F2MB-R</b>			
PART No.:		PACKAGING:	R=Reel
No. OF CIRCUITS:	02	PLATING:	B=Mattn Sn
PLASTIC MATERIAL:	F2M=LCP (Nature)		

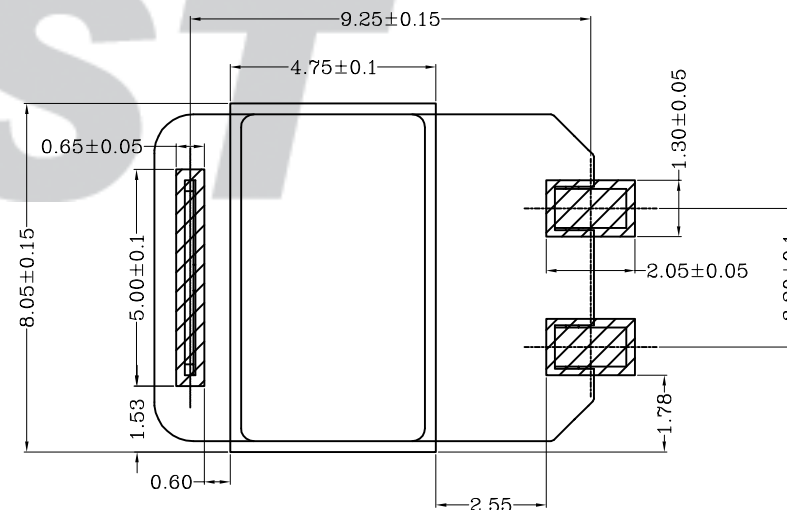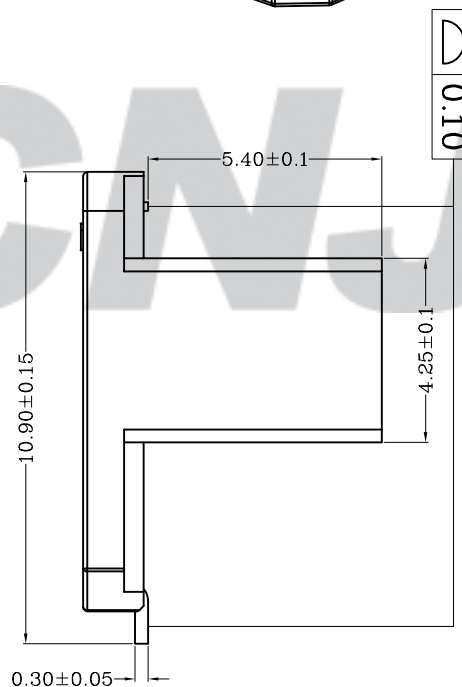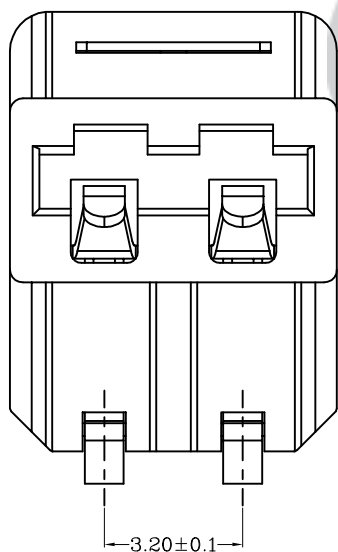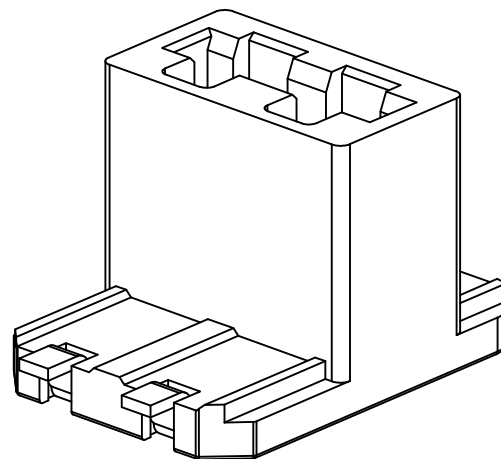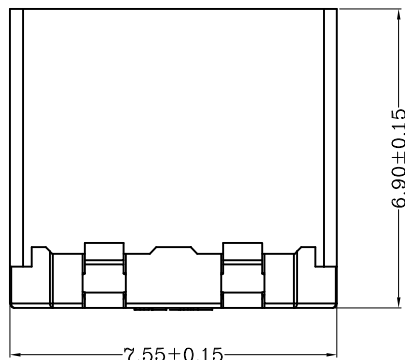

PCB LAYOUT

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
B/0	2016.04.18	NEW RELEASE		③	Solder Tabs	1	Brass	Mattn Sn
				②	Material	2	Phosphor Bronze	Mattn Sn
				①	Insulator	1	LCP (UL94V-0)	Nature (Beige)

Tolerance X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0°	Model Name: 3.20mm Pitch 180° Wafer-SMT TYPE		Drawn: 蔡忠忠 2016.04.18
	Model No: T3201M-02-F2MB-R		
UNIT: mm	SCALE: FULL	REVISION: B/0	Checked: 林旭芝
	<b>CNJST</b> 浙江捷仕泰电子有限公司 ZHEJIANG JIESHITAI ELECTRONIC CO., LTD		Approved: 刘祚杰
			DWG NO. CNJST/GCCP-0472