

RoHS Compliant

成品图



SPECIFICATION

- 1 Contact resistance: $\leq 10m\Omega$
- 2 Insulation resistance: $\geq 1000M\Omega$
- 3 Rated voltage: 250 V AC DC
- 4 Rated current: 3 A AC DC
- 5 Withstand Voltage: 800V AC/minute
- 6 Temperature Range: $-25^{\circ}C \sim +85^{\circ}C$



ORDER INFORMATION:

A2010Y-*-A6W-P**

PART No.		PACKAGING: P=PE
No. OF CIRCUITS: 2X2~2X20		PLASTIC MATERIAL: A6W=PA66 (WHITE)

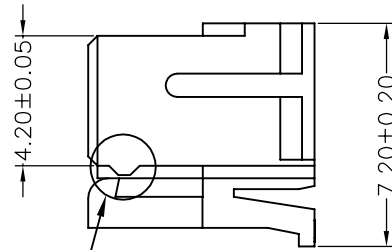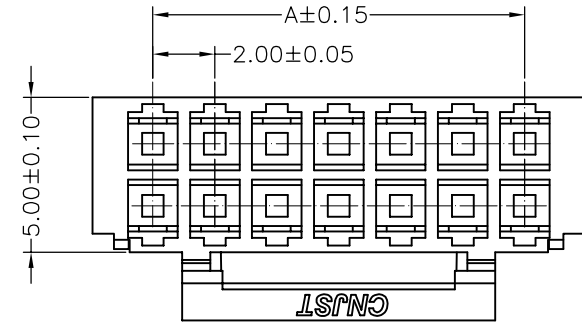

10PIN 以上(含10PIN)有该凸点

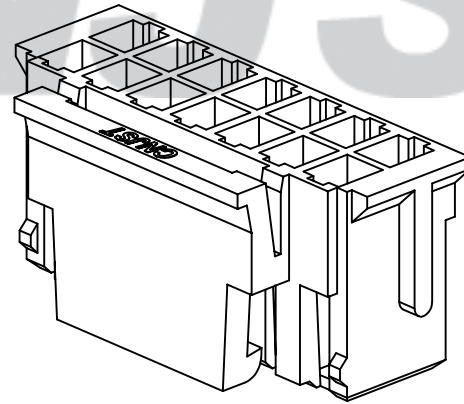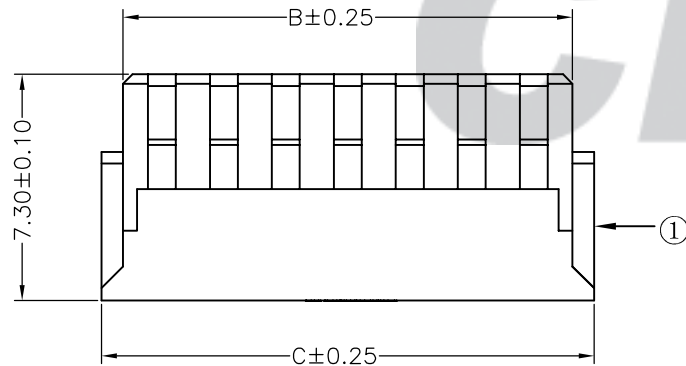

Circuits	Dimensions (mm)		
	A	B	C
202 (2X2)	2.00	4.50	5.90
203 (2X3)	4.00	6.50	7.90
204 (2X4)	6.00	8.50	9.90
205 (2X5)	8.00	10.50	11.90
206 (2X6)	10.00	12.50	13.90
207 (2X7)	12.00	14.50	15.90
208 (2X8)	14.00	16.50	17.90
209 (2X9)	16.00	18.50	19.90
210 (2X10)	18.00	20.50	21.90
211 (2X11)	20.00	22.50	23.90
212 (2X12)	22.00	24.50	25.90
213 (2X13)	24.00	26.50	27.90
214 (2X14)	26.00	28.50	29.90
215 (2X15)	28.00	30.50	31.90
216 (2X16)	30.00	32.50	33.90
217 (2X17)	32.00	34.50	35.90
218 (2X18)	34.00	36.50	37.90
219 (2X19)	36.00	38.50	39.90
220 (2X20)	38.00	40.50	41.90

Tolerance X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0°	Model Name: 2.00mm pitch Housing	Drawn: 张育斌 2016.06.12
	Model No: A2010Y-***-A6W-P	
	SCALE: FULL	REVISION: B/0
	CNJST 浙江捷仕泰电子有限公司 ZHEJIANG JIESHITAI ELECTRONIC CO., LTD	
UNIT: mm	Checked: 林旭芝	
		Approved: 刘祚杰
		DWG NO. CNJST/GCCP-0208

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
1	2016.04.12	NEW RELEASE		①	Insulator	1	PA66 (UL94V-0)	White